

A solid blue horizontal bar is located on the left side of the page, partially overlapping the text area. To the right of this bar, a pattern of blue dots of varying sizes is scattered across the black background, extending towards the bottom right corner.

SPECIALTY CARBON BLACKS FOR PRINTING INKS

Industry Information 0401

CONTENT

1. Introduction	2
2. Basics of specialty carbon black for use in printing ink applications	3
3. Flexographic and gravure printing inks for publication and packaging	3
3.1 Specifics for solvent based printing ink systems	3
3.2 Specifics for water based printing inks systems	4
4. Specifics for radiation curing printing ink systems	5
5. Specifics for offset printing inks	6
5.1 Coldset	6
5.2 Heatset and sheetfed	6
6. Specifics for screen printing inks	7



1 INTRODUCTION

This brochure provides an overview as well as specific information regarding the products of Orion that are recommended for the use in printing ink applications in the regions Europe, Africa and Near Middle East.

Using various technologies, Orion produces specially designed fine-particle carbon black pigments.

2 BASICS OF SPECIALTY CARBON BLACK FOR USE IN PRINTING INK APPLICATIONS

Although the trend in recent years has been towards increased use of colored printing inks, approximately 85.000 MT per annum of specialty carbon black are used worldwide for manufacturing printing inks. There are compelling reasons for the use of specialty carbon black as the pigment in black inks. Their high efficiency in combination with excellent fastness at relatively low cost benefits printing ink manufacturers. Orion is the only supplier that has four different process technologies (the furnace black, Degussa gas black, lamp black and the acetylene black process) to draw from and can thus offer specialty carbon black with properties which can be tailor-made for different aspects of printing ink formulations. These products are supplied to printing ink manufacturers under the trade names PRINTEX®, NEROX® and SPECIAL BLACK.

The most important features of specialty carbon black are the size of the pigment primary particles and the structure of the aggregates. These parameters define the colorimetric properties such as undertone, optical density, gloss and also the rheological effect of the specialty carbon black and their dispersibility in binders.


Irrespective of the print technology, properties of the printing ink are strongly influenced by the primary particle size and structure of a specialty carbon black. Valid relationships for film thicknesses of less than 10 µm, typical for printing inks, are shown in figure 1.

Another important property of the specialty carbon black is the nature of the pigment surface, which depends on the production process. Products manufactured by the Degussa gas black technology already possess a high proportion of volatile components measured at 950°C, which indicates a high level of functional surface groups. Surface functional groups of a furnace black are the result of a special

aftertreatment process. Such products are also part of Orion’s portfolio of carbon blacks under the names SPECIAL BLACK and NEROX®. The surface chemistry is important for the wettability of the carbon black by the binder, and in this way also influences properties such as ink rheology and gloss. Aftertreated specialty carbon black can be identified by acidic pH values and significantly higher volatile matter contents at 950°C in comparison to the untreated grades.

As can be seen from this short introduction finished ink performance is determined by a multitude of properties of specialty carbon black and their interaction with the various other fomulation components. Furthermore the choice of the right specialty carbon black is largely determined by the print technology and its special demands on printing ink properties, such as color development, dispersing technology, binder system, rheology, film thickness, ink/water balance, matting or optical density.

Figure 1

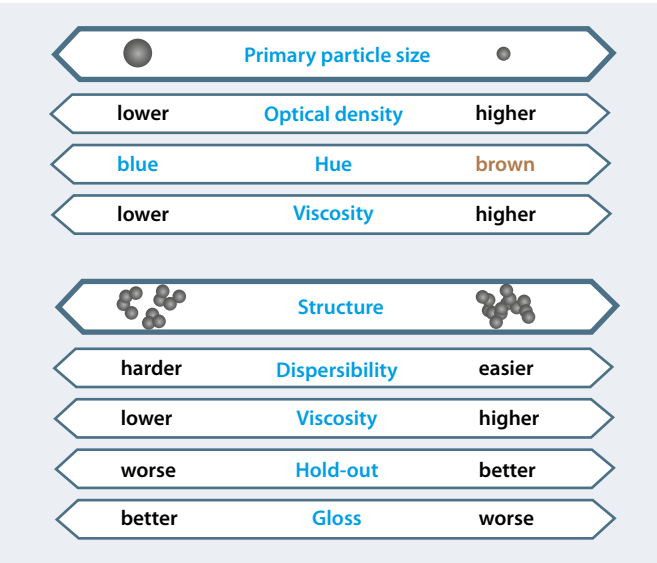

3 FLEXOGRAPHIC AND GRAVURE PRINTING INKS FOR PUBLICATION AND PACKAGING

3.1 Specifics for solvent based printing ink systems

Solvent based flexographic and gravure printing ink formulations have a low viscosity and exhibit particular demands for additives and co-binders. High pigment loadings (usually organic or carbon black) must be perfectly wetted out and stabilized. The most diverse print substrates require quick and efficient surface wetting, and the drying of the ink must be fast.

The varying types of substrates from absorbent board to coated papers or films pose a challenge for the for-

mulator of printing inks for packaging. These solvent based printing inks contain Nitrocellulose (NC) often combined with Polyamide (PA), Polyurethane (PU) or Polyvinylbutyral (PVB). When choosing the appropriate black pigment it is important to ensure the correct combination of binders. Although various pigments can be well-wetted with nitrocellulose, the compatibility of the black base with different binders is the decisive factor in determining the final printing ink properties.

Depending on the specific binder combination and requirements of the final printing ink, aftertreated furnace blacks, untreated grades and also gas blacks can be used. In practice, densified or beaded specialty carbon black show advantages such as higher optical density and gloss compared with low-densified products. Recommended specialty carbon black are summarized in **table 1**.

Publication gravure inks are processed at very high speeds necessitating a very low viscosity of the printing ink. The use of low structured specialty carbon black with relatively large primary particle sizes, such as PRINTEX® 25 and PRINTEX® 35, permits formulation of low viscosity printing inks with excellent coverage, optical density, blue undertone and gloss. For minimum abrasion levels, these grades are monitored with the well-known Burda-tester.

Table 1

Recommended specialty carbon black for solvent based inks

PRODUCT	CHARACTERISTICS	EFFECTS
SPECIAL BLACK 4	RCG* type, aftertreated black used in high jetness packaging inks	Maximum jetness combined with excellent compatibility with PA- and NC-binders in packaging inks
SPECIAL BLACK 350 NEROX® 3500	LCF** type, low structured, aftertreated black; used in packaging inks	Excellent flow properties combined with high jetness; superior compatibility with PA- and NC-binders in packaging inks
SPECIAL BLACK 250 NEROX® 2500	LCF** type, low structured, aftertreated black; used in packaging inks	Excellent flow properties combined with distinct bluish undertone; superior compatibility with PA- and NC-binders in packaging inks
PRINTEX® 47 A	RCF*** type, used in packaging inks and ink concentrates	Very high jetness and gloss at a low rheological impact; versatile grade to used used in various solvent based packaging ink sytems
PRINTEX® 35	LCF** type, low structured black used in packaging and publication gravure inks and ink concentrates	Excellent flow properties combined with high jetness; good compatibility with PU-, PVB-, and NC-binders in packaging inks
PRINTEX® 25	LCF** type, low structured black used in packaging and publication gravure inks and ink concentrates	Excellent flow properties combined with distinct bluish undertone; good compatibility with PU-and NC-binders in packaging inks

* International classification as regular color gas black ** International classification as low color furnace black *** International classification as regular color furnace black

3.2 Specifics for water based printing ink systems

In recent years, water based printing inks have become increasingly important. Extensive work of ink formulators and raw material suppliers has opened the door to truly high quality applications.

The selection of the most suitable specialty carbon black for water based flexographic and gravure inks is mainly dependent on the final substrate and the desired colorimetric properties.

In the manufacture of water based inks for flexographic and gravure printing, the pigment can be dispersed as a resin free concentrate or in conjunction with a grinding resin.

High structured furnace black pigments such as PRINTEX® 30 typically feature high optical densities on absorbent substrates like corrugated cardboard.



Nevertheless the influence of these pigments on the flow properties of the printing inks has to be taken into account. Low structured grades, e. g. PRINTEX® 45, give excellent results on non-absorbent substrates such as coated paper or films. These pigments have less effect on the viscosity and therefore allow high pigment loadings.

Table 2**Recommended specialty carbon black for water-based inks**

PRODUCT	CHARACTERISTICS	EFFECTS
PRINTEX® 60	RCF* type, high structured black for absorbent substrates	Excellent hold out and therefore highest jetness
PRINTEX® 45	RCF* type, low structured black for non-absorbent substrates	Excellent balance of high jetness and bluish undertone
PRINTEX® 3	RCF* type, high structured black for absorbent substrates	Excellent hold out and therefore high jetness
PRINTEX® 30	RCF* type, high structured black for absorbent substrates	Moderate influence on the rheology; very good hold out and therefore high jetness
PRINTEX® 300	RCF* type, medium structured black for non-absorbent substrates	Moderate influence on the rheology
PRINTEX® zeta A BEADS	RCF* type, high structured, beaded black for absorbent substrates	Moderate influence on rheology, good hold out

* International classification as regular color furnace black

4 SPECIFICS FOR RADIATION CURING PRINTING INK SYSTEMS

Radiation-curing flexographic, screen and offset printing inks are strong growth areas. The general characteristic of specialty carbon black is the absorption of radiation not only in the visible part of the spectrum, but also in the ultraviolet region. The binders used for these inks are already relatively high in viscosity, which is further increased by the incorporation of high surface area pigments. The concept of radiation-curing (i.e. UV-curing) of black printing inks is a challenge due to the fact, that the formulation of radiation-curing black ink needs the specialty carbon

black and the binder-system in the formulation to be a perfect match. SPECIAL BLACK 250, a low structured aftertreated furnace black, is Orion's main recommendation to these demands. Due to its surface chemistry this specialty carbon black shows excellent wettability and exhibits excellent flow properties. Additionally, printing inks formulated with SPECIAL BLACK 250 show good through-cure combined with good colorimetric properties. The full range of suitable specialty carbon black is listed in **table 3**.

Table 3**Recommended specialty carbon black for radiation curing inks**

PRODUCT	CHARACTERISTICS	EFFECTS
SPECIAL BLACK 250	LCF* type, low structured, aftertreated black	Excellent wetting behavior due to surface aftertreatment; little influence on rheology combined with very good through-cure and bluish undertone
SPECIAL BLACK 350	LCF* type, low structured, aftertreated black	Excellent wetting behavior due to surface aftertreatment; little influence on rheology combined with good through-cure and high jetness
NEROX® 2500	LCF* type, low structured, aftertreated black	Excellent wetting behavior due to surface aftertreatment; improved flow combined with very good through-cure and bluish undertone
NEROX® 3500	LCF* type, low structured, aftertreated black	Excellent wetting behavior due to surface aftertreatment; good flow combined with good through-cure and highest jetness
SPECIAL BLACK 4	RCG** type; aftertreated black	Excellent wetting behavior due to surface aftertreatment; high jetness at reduced pigment loading

* International classification as low color furnace black

** International classification as regular color gas black



5 SPECIFICS FOR OFFSET PRINTING INKS

5.1 Coldset

The very special challenge in formulating coldset printing inks is to achieve excellent optical densities combined with good rub resistance on highly absorbent substrates.

Orion offers specialty carbon black for this area of application. The structure of the specialty carbon black has a pronounced influence on the bonding of the ink to the paper substrate. High structured specialty carbon black give an excellent hold-out, and therefore an improved optical density. Lower structured specialty carbon black are able to penetrate into the paper, so that they are well fixed and increase the rub resistance. Unfortunately this penetration has a

negative effect on the jetness. To optimize the optical properties as well as the rub resistance of the final print irrespective of the paper quality, printing ink manufacturers often do use blends of different kinds of specialty carbon black.

Additional requirements on specialty carbon black are related to processing like automated production of coldset printing inks where sufficient handling and conveying of specialty carbon black is favorable. Beaded carbon blacks are especially suitable, as they feature little formation of dust and good flow properties. Typical specialty carbon black for this application are PRINTEX® 30, PRINTEX® zeta A BEADS and PRINTEX® 300.

Table 4

Recommended specialty carbon black for coldset inks

PRODUCT	CHARACTERISTICS	EFFECTS
PRINTEX® zeta A BEADS	RCF* type; high structured black	All purpose grade with medium flow properties and jetness
PRINTEX® 300	RCF* type; medium structured black	High jetness achievable; good flow characteristics for high speed presses; lower binder demand for improved rub resistance.

* International classification as regular color furnace black



5.2 Heatset and sheetfed

Heatset printing technique is suitable for a very broad range of substrates ranging from super calendered papers (SC) through light weight papers (LWC) to coated papers. The formulation of the printing inks, including the choice of specialty carbon black, needs to take this into account to ensure the best possible print quality independent of the paper quality.

Printed media produced with sheetfed printing technique is often high-end, typically on coated paper. High optical densities in combination with high gloss are key requirements.

For the production of such high quality heatset and sheetfed printing inks, low structured specialty carbon black are the products of choice. In some special cases, the usage of aftertreated specialty carbon black improves the flowability. The specialty carbon black mainly used in heatset and sheetfed inks are PRINTEX® 45, PRINTEX® 35 and PRINTEX® 25. All three grades are low structured furnace black pigments that impart good flow properties. PRINTEX® 45, with the smallest primary particle size of the three grades, gives excellent optical density whereas PRINTEX® 25 with the largest primary particle size provides an excellent bluish undertone.

PRINTEX® 25 is also suitable for use in combination with PRINTEX® 35 and PRINTEX® 45 to increase the bluish undertone while reducing the viscosity.

Appropriate specialty carbon black grades are listed in **table 5**.

Table 5

Recommended specialty carbon black for heatset and sheetfed inks

PRODUCT	CHARACTERISTICS	EFFECTS
PRINTEX® 55	RCF* type; low structured black	Highest jetness for sheetfed printing inks
PRINTEX® 45	RCF* type; low structured black	Excellent color properties with medium flow; excellent jetness
PRINTEX® 35	LCF** type; low structured black	High jetness combined with a bluish undertone; good flow; high pigment loadings achievable
PRINTEX® 25	LCF** type; low structured black	Excellent flow properties permitting highest loading levels; best bluish undertone
SPECIAL BLACK 350	LCF** type; aftertreated, low structured black	High jetness combined with a bluish undertone; excellent wetting behavior

* International classification as regular color furnace black

** International classification as low color furnace black

6 SPECIFICS FOR SCREEN PRINTING INKS

Screen printing differs in some respects from other printing techniques, with the most obvious differences being the printing speed and the applied film thickness. Both properties influence the formulation of the printing inks. The higher film thickness applied means that lower specialty carbon black concentrations are needed. The optical density, bluish undertone and the level of gloss are high and the flow properties of the ink have an important influence on the behavior of the ink during application.

For both, solvent based and radiation-curing screen printing inks, SPECIAL BLACK 4 is the product of choice for excellent optical density and gloss. In water based systems PRINTEX® 60 is recommended. SPECIAL BLACK 250 is the preferred solution for low viscosity UV curing systems and PRINTEX® 25 for either solvent based and water based ink formulations.

Table 6

Recommended specialty carbon black for screen printing inks

PRODUCT	CHARACTERISTICS	EFFECTS
SPECIAL BLACK 4	RCG* type; aftertreated black used in solvent based and radiation-curing screen printing inks	Excellent wetting behavior due to high degree of surface functional groups; excellent jetness combined with good through-cure and optimized flow in flat bed screen inks
SPECIAL BLACK 250	LCF** type, low structured, aftertreated black; used in solvent based and radiation-curing screen printing inks	Excellent wetting behavior due to surface functional groups; excellent flow combined with very good through-cure and bluish undertone
PRINTEX® 60	RCF*** type, high structured black	High jetness in water based flat bed screen inks
PRINTEX® 25	LCF** type, lowest structured black	Good flow in solvent based and water based rotary screen inks

* International classification as regular color gas black

** International classification as low color furnace black

*** International classification as regular color furnace black

THE AMERICAS

Orion Engineered Carbons LLC
1700 City Plaza Drive, Suite 300
Spring, TX 77389
USA
Phone +1 832 445 3300
AMERICAS@orioncarbons.com

EUROPE/ MIDDLE EAST/ AFRICA

Orion Engineered Carbons GmbH
Frankfurter Straße 60 - 68
65760 Eschborn
Germany
Phone +49 6196 771 929 100
EMEA@orioncarbons.com

ASIA PACIFIC

Orion Engineered Carbons (China) Investment Co., Ltd.
Room 2301, 2302, 2307, BM InterContinental Business Center
100 Yutong Road, Jing'an District, Shanghai 20007
P. R. China
Phone +86 21 6107 0966
APAC@orioncarbons.com

INCORPORATED IN LUXEMBURG

Orion S.A., 6, Route de Trèves, 2633 Senningerberg, Luxembourg, Phone +352 270 48 06 0

All statements and information given herein by Orion Engineered Carbons GmbH as well as its affiliates, including for example **Orion S.A. ("Orion")**, are provided for information purposes only and are provided as of the date of this document. They are based on the knowledge of Orion on the date of the document. ORION DOES NOT GIVE ANY REPRESENTATION OR WARRANTY THAT THE CONTENTS OF THE GIVEN STATEMENTS AND INFORMATION ARE CORRECT OR ACCURATE. ANY LIABILITY OF ORION WITH REGARD TO THE CONTENTS PROVIDED ARE HEREBY EXPRESSLY EXCLUDED. Orion does not give a warranty or makes any representation with respect to any results to be obtained from such statements or information, any uses of such information or with regard to the non-infringement of any proprietary right. Nothing stated herein shall be construed as a license of or recommendation for use, especially with concern to the potential infringement of any proprietary right. Use or application of such information or statements or the material or systems described herein are at user's sole discretion and risk. The user acknowledges that Orion shall bear no responsibility or liability for any use or application of such information or statements or the material or systems described herein. All sales are subject to the respective standard terms and conditions of sale and delivery issued by Orion including but not limited to the limitation of liability contained therein. The Orion standard terms and conditions of sale and delivery (English) can be reviewed, downloaded and printed under https://orioncarbons.com/legal/compliance-guidelines/#terms_conditions.

Any and all information disclosed by Orion herein shall remain the property of Orion.

© 2024 Orion Engineered Carbons GmbH



www.orionsa.com